Accessories

TCH75IR02

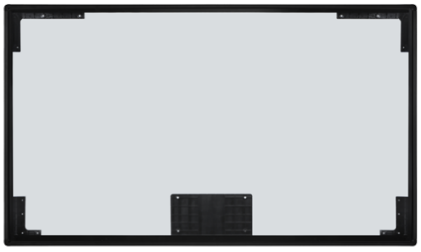

Key Features

Display

Available Sizes	55”, 65” and 75”

Touch Interactivity

Type of Touch Technology	Infrared (IR) Technology
Continuous Touch Points	20 Points
Sensitivity	Any touch with finger, gloved hand or pointer
Connectivity	HID, TUIO, Flash
Compatibility	Windows®7, Windows®8, Windows®10, Vista, XP, Mac® OS, Linux, Android
Orientation	Portrait and landscape support
Calibration	No need
Accuracy	90% <
Reporting Rate	Up to 450 fps
Glass Type	Anti-Glared (AG), 4mm Tempered
Frame Rate	Up to 450 fps
Communication	USB2.0
Power Supply Mode	USB
Supply Voltage	DC 5V +/- 5%
Average Current	< 400 mA
Response Time	< 5 ms
Touch Accuracy	+/-1mm (over 90% area)
Touch Durability	Unlimited
HID Compatibility	USB
Object Sizes for Touch	2.8 & 6.4 mm + Palm

Mechanical Dimensions

Bezel Width	B: 19 | T: 19 | L/R: 19 mm
Weight (kg)	TBD